

Edition: 05/06 - subject to change

Supersedes: /
Status: valid

64751 (230/240V)


■ Product description

The OSRAM 64751 is typically used in photographic or film studios and theaters. The main applications are Cyclorama Lights and Halogen Softlights. The Cyc lights provide a uniform wash, which makes them especially suited to cyc and backdrop lighting. Softlights are indirect fill-lights that provide a very soft even wash of light.

■ Technical Data

Lamp / order reference		64751
ANSI		ELL
LIF		P2/12
Rated lamp wattage	W	1250
Rated lamp voltage	V	230/240
Average life-time	h	200
Color temperature	K	3200
Luminous flux	lm	33500
Luminous efficiency	Lm/W	27.60 (27.00*)
Base		R7s
Diameter d	mm	12 max.
Lamp length L ₁	mm	185.7 max.
Length of coil L ₂	mm	125
Type of coil		SC

*) referred to 240V

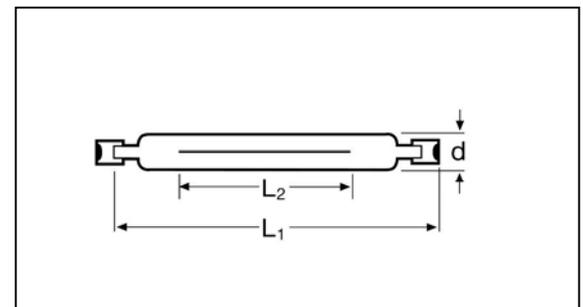

■ Lamp operation

Max. pinch seal temperature	°C	350 °C max.
Burning position		p15