

Edition: 05/06 - subject to change

Supersedes: /
Status: valid


64788 (230/240V)

■ Product description

The OSRAM 64788 is mainly used for studio and theatre lighting as well as film production. This is a popular lamp and widely fitted into Frensel, Profile, PC Spot and Follow Spot luminaires.

■ Technical Data

Lamp / order reference	64788	
ANSI	FTM	
LIF	CP/72	
Rated lamp wattage	W	2000
Rated lamp voltage	V	230/240
Average life-time	h	400
Color temperature	K	3200
Luminous flux	lm	52000
Luminous efficiency	Lm/ W	25.40
Base	GY16	
Diameter d	mm	34 ± 1
Lamp length L	mm	145 max.
LCL a	mm	70 ± 2
Filament dimensions (w x h)	mm	20 x 19
Type of coil	biplan	

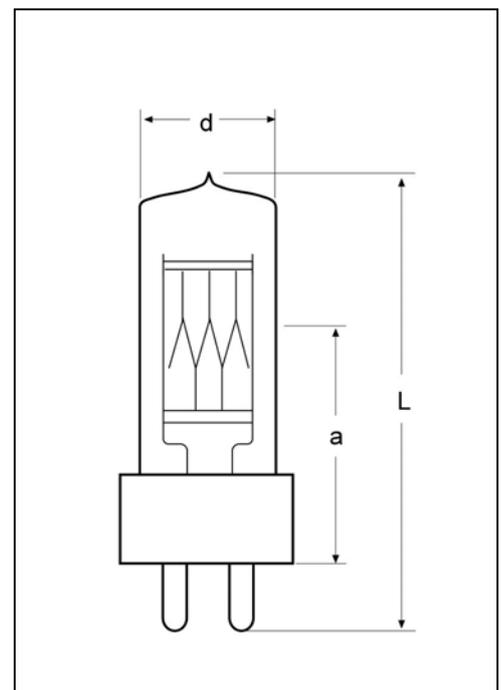

■ Lamp operation

Max. pinch seal temperature	°C	350°C max.
Burning position	s90	
Fuse protection	10A quick	