



# Actinic BL TL(-K) / TL-D(-K)

## Actinic BL TL 8W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

| General Information |         |
|---------------------|---------|
| Cap-Base            | G5 [G5] |

| Light Technical                 |         |
|---------------------------------|---------|
| Color Code                      | 10      |
| Color Designation               | Actinic |
| Chromaticity Coordinate X (Nom) | 222     |
| Chromaticity Coordinate Y (Nom) | 210     |

| Operating and Electrical |         |
|--------------------------|---------|
| Power Consumption        | 7.1 W   |
| Lamp Current (Nom)       | 0.145 A |
| Voltage (Nom)            | 56 V    |

|               |      |
|---------------|------|
| Voltage (Nom) | 56 V |
|---------------|------|

| Mechanical and Housing |              |
|------------------------|--------------|
| Bulb Shape             | T16 [T 16mm] |

| Approval and Application   |        |
|----------------------------|--------|
| Mercury (Hg) Content (Nom) | 4.4 mg |

| Product Data                  |                                 |
|-------------------------------|---------------------------------|
| Full product code             | 871150026042027                 |
| Order product name            | Actinic BL TL 8W/10 1FM/10X25CC |
| Order code                    | 928001001030                    |
| Numerator - Quantity Per Pack | 1                               |


## Actinic BL TL(-K) / TL-D(-K)

|                                 |                                 |
|---------------------------------|---------------------------------|
| Numerator - Packs per outer box | 250                             |
| Material number (12NC)          | 928001001030                    |
| Full product name               | Actinic BL TL 8W/10 1FM/10X25CC |


|                |               |
|----------------|---------------|
| EAN/UPC - Case | 8711500260444 |
|----------------|---------------|

### Dimensional drawing

| Product                         | D (max) | A (max)  | B (max)  | B (min) | C (max)  |
|---------------------------------|---------|----------|----------|---------|----------|
| Actinic BL TL 8W/10 1FM/10X25CC | 16 mm   | 288.3 mm | 295.4 mm | 293 mm  | 302.5 mm |

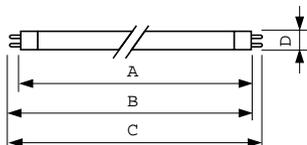

### Photometric data

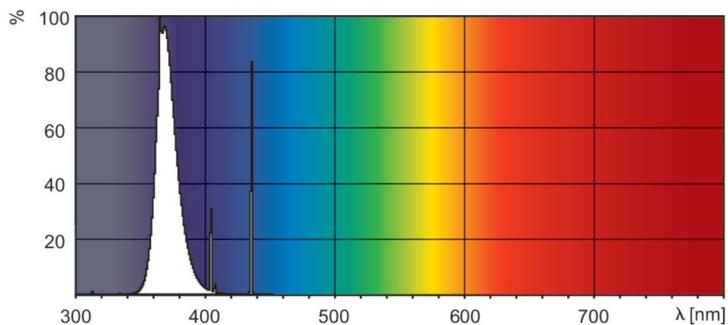

Spectral Power Distribution Colour - Actinic BL TL 8W/10 1FM/10X25CC

