



MASTER Actinic BL TL-D Secura

MASTER Actinic BL TL-D 15W/10 Secura

The Philips MASTER Actinic BL TL-D Secura family combines multiple benefits in one lamp. These lamps have the perfect spectrum for attracting insects. Also, they have virtually no UV-B output, and so are perfectly safe. Furthermore, they have the special "MASTER" coating to improve the efficiency, initial UV-A output and maintenance of the lamp. And finally, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, combined with their high efficiency, these lamps represent the best choice for the environment.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Operating and Electrical	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Power Consumption	15.5 W
Light Technical		Lamp Current (Nom)	0.335 A
Color Code	10	Voltage (Nom)	55 V
Color Designation	Actinic	Voltage (Nom)	55 V
Chromaticity Coordinate X (Nom)	225	Mechanical and Housing	
Chromaticity Coordinate Y (Nom)	215	Bulb Shape	T26 [T 26mm]

MASTER Actinic BL TL-D Secura

Approval and Application


Mercury (Hg) Content (Nom) 3.0 mg

Product Data

Full product code 871829119608200
Order product name MASTER Actinic BL TL-D 15W/10 Secura
Order code 928022701003


Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 25
Material number (12NC) 928022701003
Full product name MASTER Actinic BL TL-D 15W/10 Secura
EAN/UPC - Case 8718291196099

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER Actinic BL TL-D 15W/10 Secura	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Photometric data

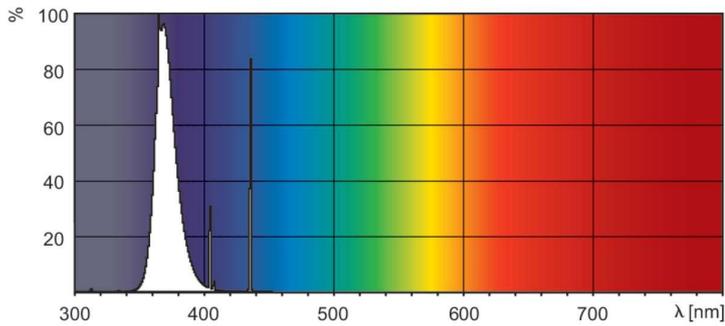

Spectral Power Distribution Colour - MASTER Actinic BL TL-D 15W/10 Secura

