



MASTERColour CDM-R111 Elite

MASTERColour CDM-R111 Elite CDM-R111 Elite 70W/930 GX8.5 10D

MASTERColour CDM-R111 Elite combines the trendy look of 111 mm aluminum-reflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

Warnings and Safety

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/930 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	GX8.5 [GX8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	8000 h
Life To 10% Failures (Nom)	9500 h
Life to 20% Failures (Nom)	10500 h
Life to 50% Failures (Nom)	12000 h
ANSI Code HID	C139/O
Switching Cycle	1050X
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	10 °

Beam Angle Technical (Nom)	11 °
Beam Angle Technical (Max)	13 °
Beam Angle Technical (Min)	9 °
Luminous Intensity (Min)	34000 cd
Luminous Intensity (Nom)	45000 cd
Beam Description	Spot
Color Designation	Warm White (WW)
Lumen Maintenance 12000 h (Nom)	70 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 4000 h (Nom)	85 %
Design Mean Lumens	2400 lm
Chromaticity Coordinate X (Nom)	0.441
Chromaticity Coordinate Y (Nom)	0.397

MASTERCcolour CDM-R111 Elite

Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	40 lm/W
Color Rendering Index (Min)	89
Color Rendering Index (Nom)	92
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	2805 lm

Operating and Electrical

Power (Nom)	73.2 W
Re-Ignition Time (Min) (Max)	15 min
Warm Up Time to 60% Light (Nom)	120 s
Ignition Time (Max)	30 s
Voltage (Max)	98 V
Voltage (Min)	80 V
Voltage (Nom)	89 V

Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

Mechanical and Housing

Bulb Finish	Reflector
-------------	-----------


Approval and Application

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	6.6 mg
Energy Consumption kWh/1000 h	80 kWh

Product Data

Full product code	871829168962100
Order product name	MASTERCcolour CDM-R111 Elite CDM-R111 Elite 70W/930 GX8.5 10D
EAN/UPC - Product	8718291689621
Order code	928195605330
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	928195605330
Net Weight (Piece)	96.000 g
ILCOS Code	MRS/UB-70/930-H-GX8.5-111/88/10

Dimensional drawing


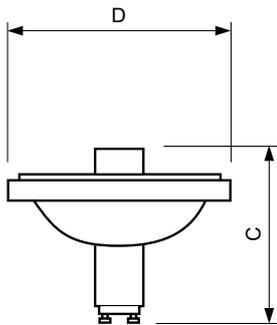


CDM-R111 Elite 70W/930 10D

Product	D (max)	C (max)
MASTERCcolour CDM-R111 Elite CDM-R111 Elite 70W/930 GX8.5 10D	111 mm	95 mm

MASTERCoulour CDM-R111 Elite

Photometric data

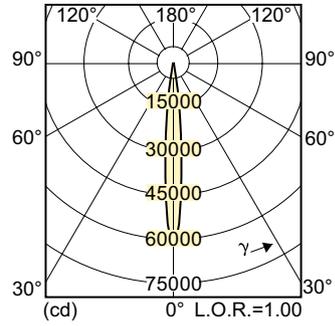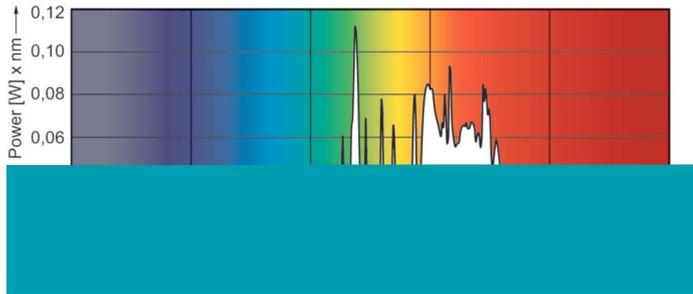

LDLD_CDMR111E_0007-Light distribution diagram

