



CorePro GLASS LED candles and lusters



CorePro LEDCandleND2-25W E14BA35 827CL G

Featuring a classic heritage design, these filament LED candle combines the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. The LED candle bulb, a very easy choice for people who are looking for a retrofit LED replacement, the LED candle provides 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light for stairway lighting. The LED candle bulb offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

| General information | | |
|--|---------------------|--|
| Cap-Base | E14 [E14] | |
| EU RoHS compliant | Yes | |
| Nominal Lifetime (Nom) | 15000 h | |
| Switching Cycle | 20000X | |
| Technical Type | 2-25W | |
| Flux measurement reference | Sphere | |
| | | |
| Light technical | | |
| Color Code | 827 [CCT of 2700K] | |
| Luminous Flux (Nom) | 250 lm | |
| Color Designation | Warm White (WW) | |
| Correlated Color Temperature (Nom) | 2700 K | |
| Luminous Efficacy (rated) (Nom) | 125.00 lm/W | |
| Color Consistency | <6 | |
| Color Rendering Index (Nom) | 80 | |
| LLMF At End Of Nominal Lifetime (Nom) 70 % | | |
| | | |

| Operating and electrical | |
|---------------------------------|-------------|
| Input Frequency | 50 to 60 Hz |
| Power (Nom) | 2 W |
| Lamp Current (Nom) | 20 mA |
| Wattage Equivalent | 25 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.4 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 36 °C |
| | |
| Controls and dimming | |
| Dimmable | No |
| | |
| Mechanical and housing | |
| Bulb Finish | Clear |
| | |

Datasheet, 2022, January 13 data subject to change

CorePro GLASS LED candles and lusters

| Bulb Shape | BA35 |
|-------------------------------|-----------------|
| | |
| Approval and application | |
| Energy Efficiency Class | E |
| Energy Saving Product | Yes |
| Suitable For Accent Lighting | No |
| Energy Consumption kWh/1000 h | 2 kWh |
| EPREL Registration Number | 387361 |
| | |
| Product data | |
| Full product code | 871951437759200 |

| Order product name | CorePro LEDCandleND2-25W E14BA35 827CL | |
|---------------------------------|--|--|
| | G | |
| EAN/UPC - Product | 8719514377592 | |
| Order code | 929001238492 | |
| Numerator - Quantity Per Pack | 1 | |
| Numerator - Packs per outer box | 10 | |
| Material Nr. (12NC) | 929001238492 | |
| Net Weight (Piece) | 0.014 kg | |
| | | |


Dimensional drawing




| Product | D | С |
|--|-------|--------|
| CorePro LEDCandleND2-25W E14BA35 827CL G | 35 mm | 123 mm |

CorePro LEDCandleND2-25W E14BA35 827CL G

Photometric data

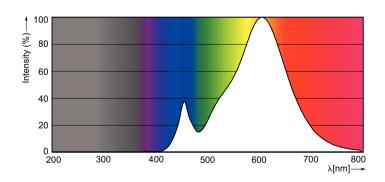




LED Lamps, Lightcolour /827 ND CL

Classic LEDCandle ND 2-25W BA35 827 CL


CorePro GLASS LED candles and lusters


Photometric data



Classic LEDCandle ND 2-25W BA35 827 CL

Lifetime

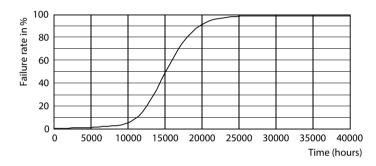



Life Expectancy Diagram

Lumen Maintenance Diagram



© 2022 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.