



# MASTERCcolour CDM-TC Elite



## MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12

Compact, single-ended, very high-efficiency, long-life ceramic metal-halide discharge lamp producing crisp white sparkling light with high color rendering

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information			
Cap-Base	G8.5 [ G8.5]	Luminous Flux (Nom)	4000 lm
Operating Position	UNIVERSAL [ Any or Universal (U)]	Luminous Flux (Rated) (Min)	3600 lm
Life to 5% Failures (Nom)	12000 h	Luminous Flux (Rated) (Nom)	4000 lm
Life To 10% Failures (Nom)	14000 h	Color Designation	Warm White (WW)
Life to 20% Failures (Nom)	16000 h	Lumen Maintenance 12000 h (Nom)	78 %
Life to 50% Failures (Nom)	20000 h	Lumen Maintenance 10000 h (Nom)	80 %
ANSI Code HID	C130/E	Lumen Maintenance 2000 h (Nom)	93 %
Flux measurement reference	Sphere	Lumen Maintenance 5000 h (Nom)	88 %
		Chromaticity Coordinate X (Nom)	0.434
		Chromaticity Coordinate Y (Nom)	0.398
		Correlated Color Temperature (Nom)	3000 K
		Luminous Efficacy (rated) (Nom)	102 lm/W
Light technical			
Color Code	930 [ CCT of 3000K]		

# MASTERCcolour CDM-TC Elite

Color Rendering Index (Min)	87
Color Rendering Index (Nom)	90

## Operating and electrical

Power (Nom)	39.1 W
Lamp Current Run-Up (Max)	1 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	90 V
Voltage (Min)	80 V
Voltage (Nom)	85 V

## Controls and dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min
Run-Up Time 90% (Nom)	1.5 min

## Mechanical and housing

Bulb Finish	Clear
Bulb Shape	T14 [ T 14 mm]

## Approval and application

Energy Efficiency Class	F
Mercury (Hg) Content (Max)	4.7 mg
Mercury (Hg) Content (Nom)	4.7 mg

Energy Consumption kWh/1000 h	40 kWh
EPREL Registration Number	473263

## UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Max)	0.3

## Luminaire design requirements

Bulb Temperature (Max)	500 °C
Pinch Temperature (Max)	300 °C
Pinch Temperature (Max)-DUP(do not use)	300 °C

## Product data

Full product code	872790091149700
Order product name	MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12
EAN/UPC - Product	8727900911497
Order code	928189105131
Numerator - Quantity Per Pack	1
Local code description	LAMP VAPOR MET CDM-TC CDMTC-EL35W930NG
Numerator - Packs per outer box	12
Material Nr. (12NC)	928189105131
Net Weight (Piece)	0.009 kg
ILCOS Code	MT/UB-35/930-H-G8.5-17/85

## Dimensional drawing



. D .

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12	15 mm	4.8 mm	51 mm	53 mm	52 mm	85 mm

MASTERCcolour CDM-TC Elite 35W/930 G8.5 1CT/12

# MASTERCoulour CDM-TC Elite



## Photometric data

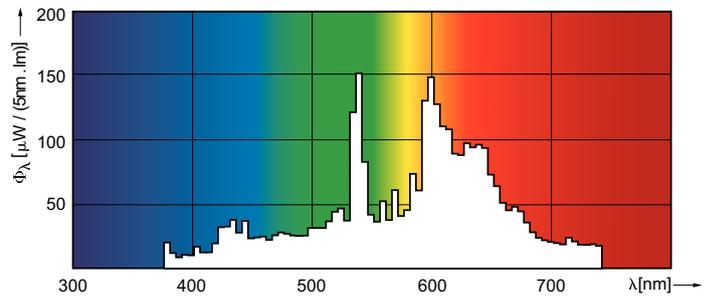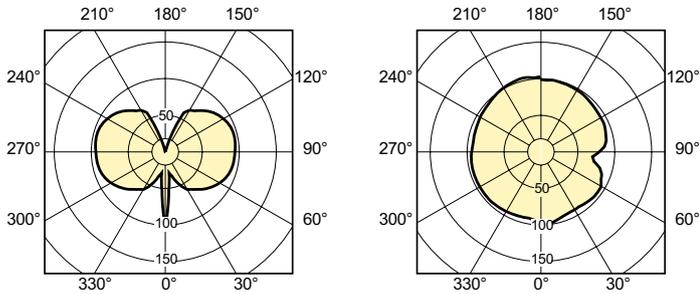

LDLD\_CDMTC-E\_0001-Light distribution diagram

LDPO\_CDMTC-E\_0001-Spectral power distribution Colour

## Lifetime

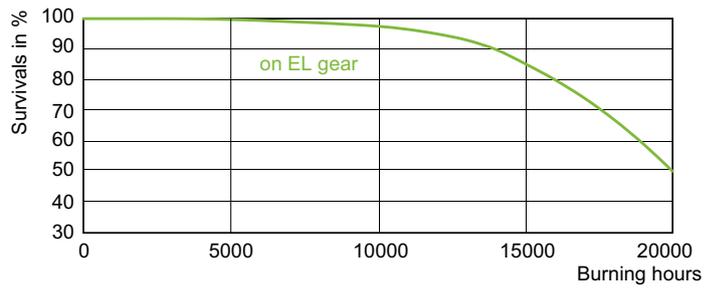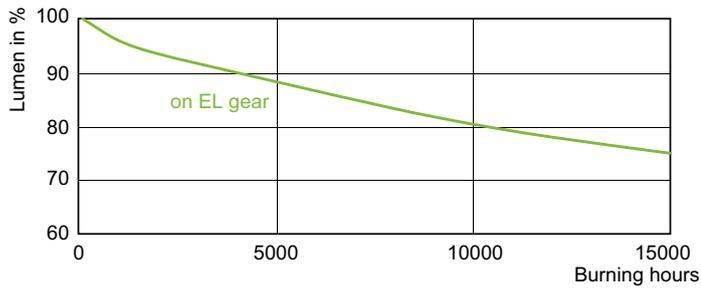

LDLM\_CDMTC-E\_0001-Lumen maintenance diagram

LDLE\_CDMTC-E\_0002-Life expectancy diagram

