

Edition: 05/06 - subject to change
Supersedes: 09/90
Status: valid

64717 (230/240V)


■ Product description

The OSRAM 64717 is mainly used for studio and theatre lighting as well as film production and fitted into Frensel, Profile, PC Spot and Follow Spot luminaires.

■ Technical Data

| | | |
|-----------------------------|------|----------|
| Lamp / order reference | | 64717 |
| ANSI | | FRL |
| LIF | | CP/89 |
| Rated lamp wattage | W | 650 |
| Rated lamp voltage | V | 230/240 |
| Average life-time | h | 150 |
| Color temperature | K | 3200 |
| Luminous flux | lm | 16250 |
| Luminous efficiency | Lm/W | 25 (26*) |
| Base | | GY 9.5 |
| Diameter d | mm | 23 |
| Lamp length l | mm | 90 |
| LCL a | mm | 46.5 ± 1 |
| Filament dimensions (w x h) | mm | 26 x 33 |
| Type of filament | | biplan |

* referred to 240V

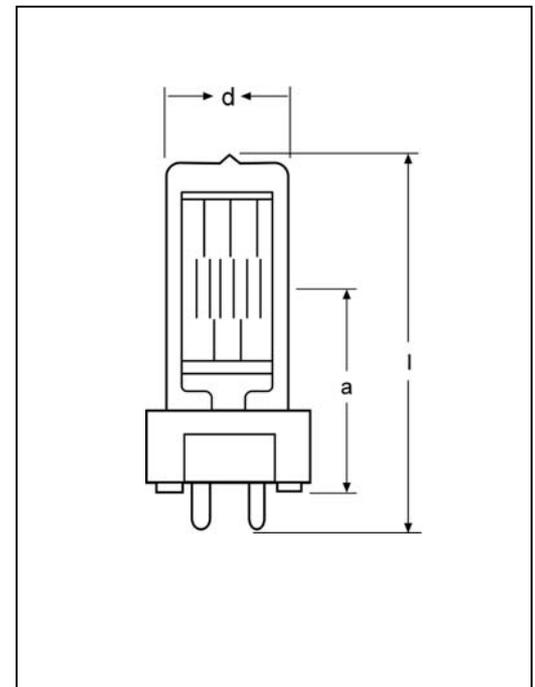

■ Lamp operation

| | |
|--------------------------------|---|
| Max. pinch seal temperature °C | 350°C max. |
| Burning position | s90 |
| Fuse protection | D-Fusing 500 V, 4 A quick |
| Remarks | Use of closed luminaires is recommended |