



Corepro - LED HID HPL



TForce Core LED HPL 18W E27 830 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data


General Information		Color Designation	
Cap-Base	E27	Color Designation	White (WH)
Nominal lifetime	25,000 hour(s)	Correlated Color Temperature (Nom)	3000 K
Switching Cycle	15,000	Luminous Efficacy (rated) (Nom)	166 lm/W
Lighting Technology	LED	Color Consistency	<6
Flux measurement reference	Sphere	Color rendering index (CRI)	80
CE mark	Yes	LLMF At End Of Nominal Lifetime (Nom)	0.7 %
EU RoHS compliant	Yes	Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Light Technical		Stroboscopic effect visibility measure (SVM)	1.6
Color Code	830 [CCT of 3000K]	Photobiological safety according to EN 62471	RG1
Beam Angle (Nom)	300 degree(s)	Operating and Electrical	
Luminous Flux	3,000 lm	Line Frequency	50 to 60 Hz

Corepro - LED HID HPL

Input Frequency	50 to 60 Hz
Power Consumption	18 W
Lamp Current (Nom)	170 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Inrush current at mains	26
Max. lamp no. on MCB B type 10A - Mains	7
Max. lamp no. on MCB B type 10A – EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 10A – EM ballast with Comp. Cap.	-
Max. lamp no. on MCB B type 16A - Mains	12
Max. lamp no. on MCB B type 16A – EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 16A – EM ballast with Comp. Cap.	-
Ballast Compatibility	Mains
Temperature	
Ambient temperature range	-30 to +45 °C
T-Case Maximum (Nom)	50.4 °C
Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	ED75
Approval and Application	
Energy Efficiency Class	C
Energy Consumption kWh/1000 h	18 kWh
EPREL Registration Number	403620
Product Data	
Order product name	TForce Core LED HPL 18W E27 830 FR
Full product name	TForce Core LED HPL 18W E27 830 FR
Full product code	871869975029900
Order code	929002349902
Material Nr. (12NC)	929002349902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699750299
Numerator - Packs per outer box	6
EAN/UPC - Case	8718699750305



Dimensional drawing

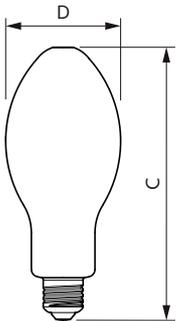

Product	D	C
TForce Core LED HPL 18W E27 830 FR	75 mm	180 mm


Corepro - LED HID HPL

Photometric data

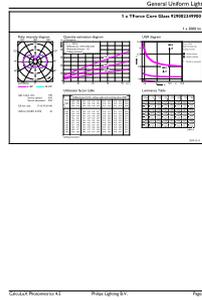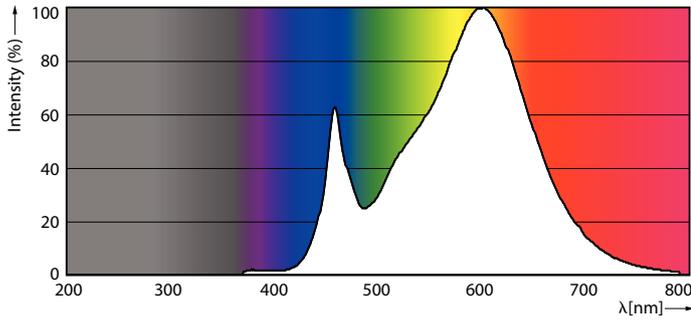


Spectral Power Distribution Colour - TForce Core LED HPL 18W E27 830 FR

General uniform lighting - TForce Core LED HPL 18W E27 830 FR

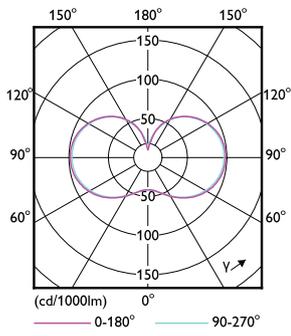


Light Distribution Diagram - TForce Core LED HPL 18W E27 830 FR

Lifetime

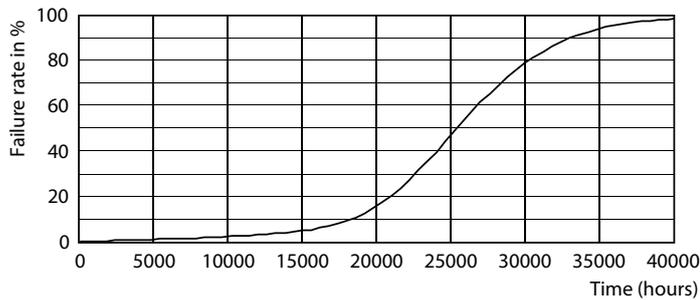

Life Expectancy Diagram - TForce Core LED HPL 18W E27 830 FR

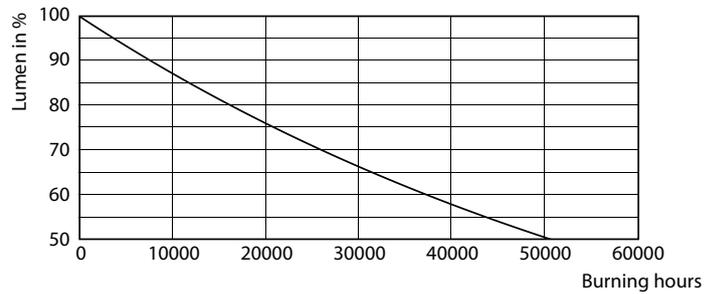

Lumen Maintenance Diagram - TForce Core LED HPL 18W E27 830 FR

Corepro - LED HID HPL

